

# SL16

## ScreenLine® | The revolution in integrated blind systems



First integrated blind system in 16 mm cavity

- Exclusive 10-mm slats
- Every component expressly designed for a 16-mm cavity
- IG units with SL16 integrated blind systems can be installed without replacing most existing window frames

## SL16S Venetian

**Patented technology**

Patent-pending system of internal cord winding on tube reduces the blind friction

**Clean lines**

Lack of plastic joints between internal components ensures formal simplicity

**Energy**

Patented warm edge spacer bars

**Accuracy**

Patented bottom rail self-adjustment device

**Lifespan**

Closed-loop belt transmission system allows smooth and long-lasting function

**Thermal performances**

Thermal break head rail (made up of 2 coupled parts)

**Hygiene**

External slider treated with **Sanitized®** patented antibacterial finish

**Applications**


Slim control device allows application to all types of window frames, even sliding ones

**User friendliness**


Tilting & raising operation by means of one magnetic slider

# SL16

ScreenLine® The revolution in integrated blind systems

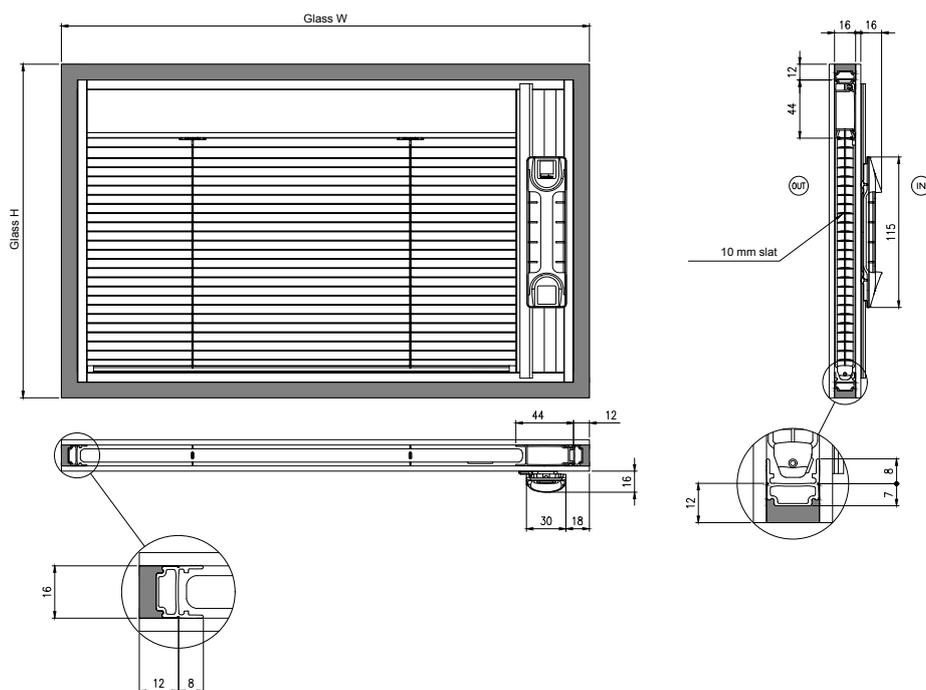

## Feasibility charts

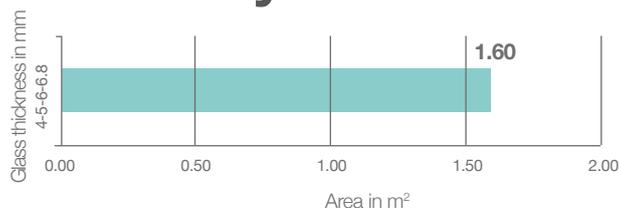

### Possible dimensions:

W min =	250 mm	W max =	1200 mm
H min =	500 mm	H max =	2000 mm

### Feasibility notes

Maximum height possible according to width

with W from	250	to	300 mm	H max =	800 mm
with W from	301	to	350 mm	H max =	1400 mm
with W from	351	to	550 mm	H max =	1800 mm
with W from	551	to	1200 mm	H max =	2000 mm*

\* For areas from 1.61 m<sup>2</sup> to 2.4 m<sup>2</sup>, blind supplied with tilt-only function and completely raised

### 10-mm slat colour range



### Warm edge spacer bar colour range

